

# FST-851 Series

## Intelligent Thermal (Heat) Detectors with FlashScan®



Intelligent/Addressable Devices

### General

Notifier FST-851 Series intelligent plug-in smoke detectors with integral communication provide features that surpass conventional detectors. Detector sensitivity can be programmed in the control panel software. Sensitivity is continuously monitored and reported to the panel. Point ID capability allows each detector's address to be set with decade address switches, providing exact detector locations for selective maintenance when chamber contamination reaches an unacceptable level. FST-851 Series thermal detectors use an innovative thermistor sensing circuit to produce 135°F/57°C fixed-temperature (FST-851) and rate-of-rise thermal detection (FST-851R) in a low-profile package. FST-851H provides fixed high-temperature detection at 190°F/88°C. These thermal detectors provide cost effective, intelligent property protection in a variety of applications. FST-851 Series detectors are compatible with all Notifier intelligent Fire Alarm Control Panels (FACPs).

FlashScan® (U.S. Patent 5,539,389) is a communication protocol developed by Notifier Engineering that greatly enhances the speed of communication between analog intelligent devices and certain NOTIFIER systems. Intelligent devices communicate in a grouped fashion. If one of the devices within the group has new information, the panel's CPU stops the group poll and concentrates on single points. The net effect is response speed greater than five times that of earlier designs.

### Features

- Sleek, low-profile, stylish design.
- State-of-the-art thermistor technology for fast response.
- Rate-of-rise model (FST-851R), 15°F (8.3°C) per minute.
- Factory preset at 135°F (57°C); high-temperature model at 190°F (88°C).
- Addressable by device.
- FlashScan® (NFS-640, NFS-3030) and classic CLIP system (AFP-100, AFP-200, AFP-300, AFP-400, NFS-640, AFP1010, AM2020, NFS-3030, NFS2-3030) compatible.
- Rotary, decimal addressing (1 – 99 on current classic systems, 1 – 159 on FlashScan® systems).
- Two-wire SLC connection.
- Visible LEDs "blink" every time the unit is addressed.
- 360°-field viewing angle of the visual alarm indicators (two bi-color LEDs). LEDs blink green in Normal condition and turn on steady red in Alarm.
- Integral communications and built-in device-type identification.
- Remote test feature from the panel.
- Built-in functional test switch activated by external magnet.
- Walk test with address display (an address of 121 will blink the detector LED 12-(pause)-1).
- Low standby current.
- Listed to UL 521.
- Backward-compatible.
- Built-in tamper-resistant feature.
- Designed for direct-surface or electrical-box mounting.
- Sealed against back pressure.



FST-851 Series in B710LP base

- Plugs into separate base for ease of installation and maintenance. Separate base allows interchange of photoelectric, ionization and thermal sensors.
- SEMS screws for wiring of the separate base.
- Constructed of off-white Bayblend®, designed to commercial standards, and offers an attractive appearance.
- 94-5V plastic flammability rating.
- Remote LED output connection to optional RA400Z remote LED annunciator.
- Optional sounder, relay, and isolator bases.
- Optional recessed (RMK400) or surface (SMK400) base mounting kits.

### Specifications

**Size:** 2.1" (5.3 cm) high x 4.1" (10.4 cm) diameter installed in B501 base, 6.1" (15.5 cm) diameter installed in B710LP base.

**Shipping weight:** 4.8 oz. (137 g).

**Operating temperature range:** FST-851 Series, FST-851R: –20°C to 38°C (–4°F to 100°F); FST-851H: –20°C to 66°C (–4°F to 150°F).

**Detector spacing:** UL approved for 50 ft. (15.24 m) center to center. FM approved for 25 x 25 ft. (7.62 x 7.62 m) spacing.

**Relative humidity:** 10% – 93% noncondensing.

**Thermal ratings:** fixed-temperature setpoint 135°F (57°C), rate-of-rise detection 15°F (8.3°C) per minute, high temperature heat 190°F (88°C).

### ELECTRICAL SPECIFICATIONS:

**Voltage range:** 15 - 32 volts DC peak.

**Standby current (max. avg.):** 200 µA @ 24 VDC (without communication); 300 µA @ 24 VDC (one communication every 5 seconds with LED enabled).

**LED current (max.):** 6.5 mA @ 24 VDC ("ON").

Bases available:

**B710LP:** 6.1" (15.5 cm) diameter.

**B501:** 4.1" (10.4 cm) diameter.

**B501BH or B501BHT:** Sounder base assembly. Includes B501 base.

**B224RB Relay Base:** Screw terminals: up to 14 AWG (2.0 mm<sup>2</sup>). Relay type: Form-C. Rating: 2.0 A @ 30 VDC resistive; 0.3 A @ 110 VDC inductive; 1.0 A @ 30 VDC inductive. Dimensions: 6.2" (15.748 cm) x 1.2" (3.048 cm).

**B224BI Isolator Base:** Dimensions: 6.2" (15.748 cm) x 1.2" (15.748 cm). Maximum: 25 devices between isolator bases. See Note 2 under Installation.

## Applications

Use thermal detectors for protection of property. For further information, go to [systemsensor.com](http://systemsensor.com) for manual I56-407-00, Applications Manual for System Smoke Detectors, which provides detailed information on detector spacing, placement, zoning, wiring, and special applications.

## Installation

The FST Series plug-in intelligent thermal detector uses a separate base to simplify installation, service, and maintenance. Installation instructions are shipped with each detector.

Mount base (all base types) on an electrical backbox which is at least 1.5" (3.81 cm) deep. Suitable boxes include:


- 4.0" (10.16 cm) square box.
- 3.5" (8.89 cm) or 4.0" (10.16 cm) octagonal box.
- Single-gang box (except relay or isolator base).
- With B501BH or B501BHT base, use a 4.0" (10.16 cm) square box.
- With B224RB or B224BI base, use a 3.5" (8.89 cm) or 4.0" (10.16 cm) octagonal box, or a 4.0" (10.16 cm) square box.

**NOTE:** 1) Because of the inherent supervision provided by the SLC loop, end-of-line resistors are not required. Wiring "T-taps" or branches are permitted for Style 4 (Class "B") wiring. 2) When using relay or sounder bases, consult data sheet DN-2243 (ISO-X) for device limitations between isolator modules and isolator bases.


## Agency Listings and Approvals

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. *Consult factory for latest listing status.*

- **UL Listed:** S747
- **ULC Listed:** CS630 (ML255)(FST-851A, FST-851HA, FST-851RA)
- **MEA Listed:** 383-02-E
- **FM Approved**
- **CSFM:** 7270-0028:196
- **BSMI:** CI313066760025
- **CCCF:** Certif. # 2004081801000018
- **U.S. Coast Guard:** 161.002/23/3 (AFP-200); 161.002/27/3 (AFP1010/AM2020); 161.002/42/1 (NFS-640)
- **Lloyd's Register:** 03/60011

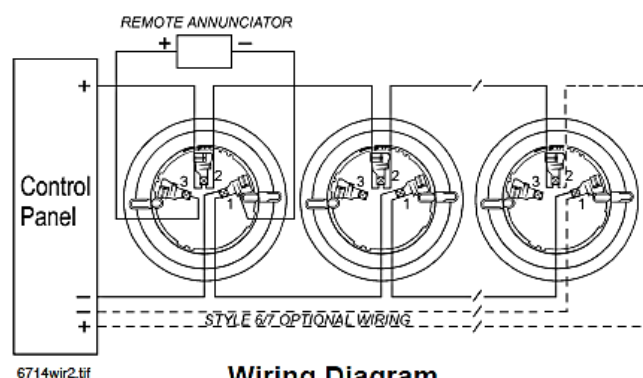

**Wiring Diagram**

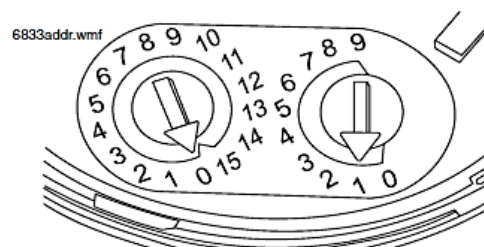

**Address dial on back of detector**

## Product Line Information

"A" suffix indicates ULC Listed model.

FST-851 Series: Intelligent thermal detector. Must be mounted to one of the bases listed below.

FST-851 SeriesA: Same as FST-851 Series but with ULC Listing.

FST-851R: Intelligent thermal detector with rate-of-rise feature.

FST-851RA: Same as FST-851R but with ULC Listing.

FST-851H: Intelligent high-temperature thermal detector.

FST-851HA: Same as FST-851H but with ULC Listing.

### BASES:

B710LPBP: Standard U.S. low-profile base, pkg. of 10.

B710LPA: Standard U.S. low-profile base, ULC Listing.

B501BP: Standard European flangeless base, pkg. of 10.

B501A: Standard European flangeless base, ULC Listing.

B501BH(A): Sounder base, includes B501(A) base.

B501BHT(A): Same as B501BH(A), but includes temporal sounder.

B224RB(A): Intelligent relay base.

B224BI(A): Intelligent isolator base. Isolates SLC from loop shorts.

### ACCESSORIES:

F110: Retrofit replacement flange for older style high profile bases. Converts bases for use with FlashScan® detectors.

RA400Z(A): Remote LED annunciator. 3 – 32 VDC. Fits U.S. single-gang electrical box. Supported by B710LPBP(A) and B501(A) bases only.

SMK400: Surface mounting kit provides for entry of surface wiring conduit. For use with B501(A) base only.

RMK400: Recessed mounting kit. For use with B501(A) base only.

SMB600: Surface mounting kit for use with B710LPBP(A).

BCK-200B: Black detector covers, box of 10.

M02-04-01: Test magnet.

M02-09-00: Test magnet with telescope stick.

XR2B: Detector removal tool. Allows installation and/or removal of FlashScan® Series detector heads from base in high ceiling installations.

T55-127-000: Detector removal tool without pole.

XP-4: Extension pole for XR2B. Comes in three 5-ft. sections.

### DETECTOR GUARDS:

NOTE: Some guards listed below may not be applicable to FST Series.

STI9601: Low-profile, flush-mount smoke detector guard, wire.\*

STI9602: Low-profile, surface-mount, smoke detector guard, wire.\*

STI9609: High-profile, flush-mount, smoke detector guard, wire.\*

STI9605: High-profile, surface-mount, smoke detector guard, wire.\*

STI 9604: Flush-mount heat detector guard, wire.\*

STI 9610: Surface-mount heat detector guard, wire.\*

\*For dimensions and additional information on STI Steel Web Stoppers, see data sheet DN-4936.

STI8200-SS: Flush-mount stainless steel smoke detector guard (compatibility pending).

STI8230-SS: Surface-mount stainless steel smoke detector guard (compatibility pending).

Notifier® and FlashScan® are registered trademarks of Honeywell International Inc. Notifier® and Bayblend® is a registered trademark of Bayer Corp. ©2007 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.  
[www.notifier.com](http://www.notifier.com)