

Fire Alarm Bell

Modular Alarm Bells




- Basic bell mounting plate to meet installation requirements.

Low Power Consumption


- Enables using bell in sufficient quantity for uniform distribution

Installation Note

- Remove a gong.
- Wire the bell in the circuit.
- Mount bell mechanism on 4" square standard outlet box with the striker facing down.
- Remove a gong.
- The bell must be mounted a minimum of 8ft., above the floor, or , as close to the ceiling as possible.
- Polarized bell provides Red(+) and Black(-) lead wires. When you install the bell, must be observed the polarity.

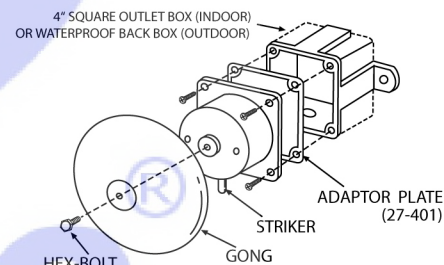

ULSZ
Audible Signal Appliances
AIP-1024
AIP-624B



Waterproof Back Box

Coil Driven Type Alarm Bell

Model	Gong Size (Inch)	Rated Voltage	Rated Current	db@10ft(3m)	Approval
AIP-1006 (Indoor)	6,8,10	6V DC	250mA	95	UL
AIP-1012 (Indoor)	6,8,10	12V DC	200mA	96	UL
AIP-1024 (Indoor)	6,8,10	24V DC	100mA	95	UL
AIP-1120 (Indoor)	6,8,10	110V AC	25mA	98	UL
AIP-1220 (Indoor)	6,8,10	220V AC	20mA	97	UL
AIP-2006 (Outdoor)	6,8,10	6V DC	250mA	95	UL
AIP-2012 (Outdoor)	6,8,10	12V DC	200mA	96	UL
AIP-2024 (Outdoor)	6,8,10	24V DC	100mA	95	UL
AIP-2120 (Outdoor)	6,8,10	110V AC	25mA	98	UL
AIP-2220 (Outdoor)	6,8,10	220V AC	20mA	97	UL

Motor Driven Type Alarm Bell

Model	Gong Size (Inch)	Rated Voltage	Rated Current	db@10ft(3m)	Approval
AIP-624B	6	24V DC	20mA	95	UL
AIP-824B	8	24V DC	20mA	83	UL
AIP-1024B	10	24V DC	20mA	85	UL